

Pave-or-Tile Non-Slip 20mm Porcelain Tiles

Tile	Size	Code	Kg Each	No. /Pallet	No. /m2	Retail Each	Retail m2
Pave-or-Tile Charcoal	600x400x20mm	N7073	11.50	144	4.17 m2	\$15.10	\$62.95
Pave-or-Tile Travertine	600x400x20mm	N7074	11.50	144	4.17 m2	\$15.10	\$62.95
Pave-or-Tile Ashville Grey	600x400x20mm	N6925	11.50	144	4.17 m2	\$15.10	\$62.95
Pave-or-Tile Chalk	600x400x20mm	N6926	11.50	144	4.17 m2	\$15.10	\$62.95

Bullnose	Size	Code	Kg Each	No. /Pallet	No. /l/m	Retail Each	Retail l/m
Pave-or-Tile Charcoal Bullnose	600x400x20mm	N7075	11.50	144	1.66 L/M	\$25.87	\$42.95
Pave-or-Tile Travertine Bullnose	600x400x20mm	N7076	11.50	144	1.66 L/M	\$25.87	\$42.95
Pave-or-Tile Ashville Grey Bullnose	600x400x20mm	N6927	11.50	144	1.66 L/M	\$25.87	\$42.95
Pave-or-Tile Chalk Bullnose	600x400x20mm	N6928	11.50	144	1.66 L/M	\$25.87	\$42.95

DELIVERY

GREATER BRISBANE METRO: North to Donnybrook (including Beerburrum but does not include Delaneys creek & D'Aguiar) - South to Coomera (does not include FlindersLake & Lyons) - West to Mt Glorious (includes Ipswich, Amberley Willowbank & Purga)
\$146 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

BRISBANE SOUTH WEST: North to Cedar Grove - South to Beaudesert - West to Kagaru
\$146 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

GOLD COAST: North to Santa Barbara - South to north of Miami Waters - West to guanaba does not include (does not includes gliston & Advancetown)
\$159 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

GOLD COAST SOUTH: North to Miami - South to Gold Coast Airport - West to Springbrook Conservation Park - East to Kirra Beach
\$198 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

GOLD COAST WEST: North to Tamborine - South to Sarabah - West to Tabragalba - East to west of Guanaba
\$198 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

SUNSHINE COAST: North to Mt Coolum - South to Mountain Creek - West to Highworth.
\$212.00 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

SUNSHINE COAST NORTH: North to Tewantin (includes Pomana) - South to Coolum Beach - West to Belli Park (also includes Cooloolabin down to Crohamhurst)
\$251.00 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

SUNSHINE COAST SOUTH: North to Sippy Downs - South to Thooloora Island - West to Glass House Mountains (also includes Commissioners Flat, Woodford, D'Aguiar and Delaneys Creek)
\$172 for first pallet, \$40.00 for every pallet thereafter. (up to 12 tonne)

APPLICATIONS

- Swimming Pool Surround
- Footpath
- Patio
- Terrace
- Commercial / Heavy Traffic *

Key Benefits

- Stain Resistant
- Slip Resistant
- Light Weight
- High Strength
- Low Maintenance

Technical

- Slip Rating AS 4586-P5
- Water absorption 0.49%
- Classification R11

* Adhesion method must be used

ASHMORE

PH: 5597 3433
ashmore@nuway.com.au

BUDERIM

PH: 5445 2173
buderim@nuway.com.au

BURPENGARY

PH: 3888 8806
burpengary@nuway.com.au

CHANDLER

PH: 3390 2477
chandler@nuway.com.au

FORESTDALE

PH: 3800 5433
forestdale@nuway.com.au

LOGAN

PH: 3808 8442
logan@nuway.com.au



MANGO HILL

PH: 3491 6372
mangohill@nuway.com.au

ORMEAU

PH: 5546 7703
ormeau@nuway.com.au

PINE RIVERS

PH: 3881 1447
pinerivers@nuway.com.au

REDLANDS

PH: 3207 7800
redlands@nuway.com.au

WESTERNS


PH: 3715 6200
western@nuway.com.au

INSTALLATION

Please be advised that the provided resources are to be used as a guide / tips only. You should consult relevant Australian Standards and consult with a licensed contractor. Please understand that installation may vary depending on site conditions. These guides are provided in good faith and do not replace the services of licensed contractors.

On Road Base and Sand

- Step 1.** Excavate the area to be paved by at least 120mm below the desired height of finished tile. (This amount may change depending on site conditions application)
- Step 2.** Spread road base and compact with plate compactor to a depth of no less than 75mm. Ensure fall gradient of at least 2:100.
- Step 3.** Spread the coarse river sand to a depth of 25mm. Use screed and screed rail to ensure a level finish.
- Step 4.** Set string lines at right angles to ensure that the joint lines are straight and square.
- Step 5.** Begin to lay tiles, using string line as a guide. Ensure to leave a 3-5mm gap for joints. (Hint: use tile spacers to ensure consistency)
- Step 6.** Cut tiles with diamond blade saw as needed
- Step 7.** Fill the joints. Use a polymer joint filling sand. Sweep sand in multiple directions until all joints are filled. Hose off when complete, ensuring not to wash sand out of the joints

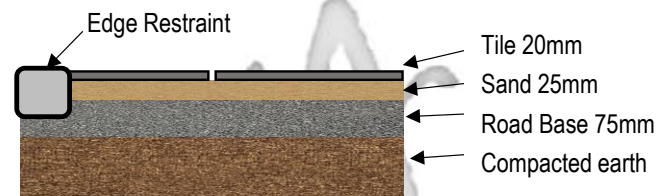

On Pedestals

- Step 1.** Prepare the concrete foundation to required specification. Ensure there is sufficient fall on existing slab
- Step 2.** Set string lines to ensure joint lines are straight and square
- Step 3.** Begin laying tiles on the pedestals. Adjust pedestals as required to keep a level surface with a slope of at least 1:100. Ensure tiles are tight and free from movement. We suggest a 3mm joint spacer should be used.
- Step 4.** Ensure all edges are securely restrained.

Note: We recommend to seek professional advice if laying tiles in this method. Pedestal height should be under 100mm. Be aware tiles may break and collapse if a heavy object falls from a height onto them.



Using Tile Adhesive

- Step 1.** Prepare the concrete foundation to required specification. Ensure there is sufficient fall on existing slab. Ensure slab has been cleaned and free from any dirt or grease.
- Step 2.** Set string lines to ensure joint lines are straight and square
- Step 3.** Use a high-quality tile adhesive. It should be flexible and suitable for exterior use. Allow for expansion joints as per Australian Standards.
- Step 4.** Use a 12mm notched trowel to apply adhesive to concrete foundation.
- Step 5.** Lay tiles using a 3-5mm joint spacing.
- Step 6.** Grout tiles when complete ensuring to thoroughly remove all excess grout before drying

Note: When using this method you should engage a professional tiler



Pave-or-Tile® is the innovative solution for all exterior flooring. Pave-or-Tile® is a 20mm thick porcelain tile design specially for outdoor applications, and an ideal choice for patios, pathways, stepping stones, step and swimming pool surrounds. Porcelain's natural properties ensures fantastic stain resistance, low maintenance, frost resistance, slip resistant, high strength and is also much lighter than its stone / concrete based alternatives. With three adaptive installation methods available, Pave-or-Tile® really is a versatile product