NUWAY PAVE-OR-TILE

Pave-or-Tile Non-Slip 20mm Porcelain Tiles

Tile	Size	Code	No/Pallet	No. M2	Retail Each	Retail M2
Pave-or-Tile Charcoal	600x600x20mm	N6798	72	2.77 M2	$19.84	$54.95
Pave-or-Tile Beige	600x600x20mm	N6800	72	2.77 M2	$19.84	$54.95
Pave-or-Tile Charcoal	600x400x20mm	N7073	144	4.17 M2	$15.10	$62.95
Pave-or-Tile Travertine	600x400x20mm	N7074	144	4.17 M2	$15.10	$62.95
Pave-or-Tile Ashville Grey	600x400x20mm	N6925	144	4.17 M2	$15.10	$62.95
Pave-or-Tile Chalk	600x400x20mm	N6926	144	4.17 M2	$15.10	$62.95

Bullnose	Size	Code	No/Pallet	No. L/M	Retail Each	Retail L/M
Pave-or-Tile Charcoal Bullnose	600x300x20mm	N6799	92	1.66 L/M	$15.63	$25.95
Pave-or-Tile Beige Bullnose	600x300x20mm	N6801	92	1.66 L/M	$15.63	$25.95
Pave-or-Tile Charcoal Bullnose	600x400x20mm	N7075	144	1.66 L/M	$25.87	$42.95
Pave-or-Tile Travertine Bullnose	600x400x20mm	N7076	144	1.66 L/M	$25.87	$42.95
Pave-or-Tile Ashville Grey Bullnose	600x400x20mm	N6927	144	1.66 L/M	$25.87	$42.95
Pave-or-Tile Chalk Bullnose	600x400x20mm	N6928	144	1.66 L/M	$25.87	$42.95

GREATER BRISBANE METRO: (Bribie Island to Coomera, West to Samford Valley)

$110 for the first pallet, $35.00 for every pallet thereafter. (up to 12 tonne)

GOLD COAST: (Helensvale to Mermaid Beach- not including Hinterland)

$132 for the first pallet, $35.00 for every pallet thereafter. (up to 12 tonne)

SOUTHERN GOLD COAST: (Miami to Coolangatta - including Mount Tamborine, Canungra, Lower Beechmont)

$165 for the first pallet, $35.00 for every pallet thereafter. (up to 12 tonne)

SUNSHINE COAST: (Beerburrum to Sippy Downs, West to Beerwah)

$143 for the first pallet, $35.00 for every pallet thereafter. (up to 12 tonne)

APPLICATIONS
- Swimming Pool Surround
- Footpath
- Patio
- Terrace
- Commercial / Heavy Traffic *

* Adhesion method must be used

Key Benefits
- Stain Resistant
- Slip Resistant
- Light Weight
- High Strength
- Low Maintenance

Technical
- Slip Rating AS 4586-P5
- Water absorption 0.49%
- Classification R11

Pave-or-Tile® is the innovative solution for all exterior flooring. Pave-or-Tile® is a 20mm thick porcelain tile design specially for outdoor applications, and an ideal choice for patios, pathways, stepping stones, step and swimming pool surrounds. Porcelain's natural properties ensures fantastic stain resistance, low maintenance, frost resistance, slip resistant, high strength and is also much lighter than its stone / concrete based alternatives. With three adaptive installation methods available, Pave-or-Tile® really is a versatile product

Scan QR code to view details on all Nuway store's

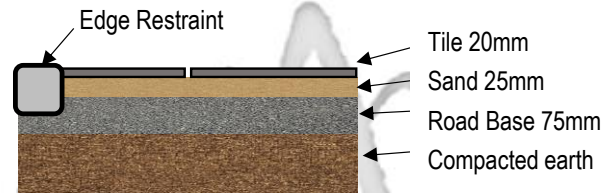| ASHMORE	BURPENGARY	CHANDLER	FORESTDALE	LOGAN
PH: 5597 3433	PH: 3888 8806	PH: 3390 2477	PH: 3800 5433	PH: 3808 8442
ashmore@nuway.com.au	burpengary@nuway.com.au	chandler@nuway.com.au	forestdale@nuway.com.au	logan@nuway.com.au
MANGO HILL	**ORMEAU**	**PINE RIVERS**	**REDLANDS**	**WESTERNS**
PH: 3491 6372	PH: 5546 7703	PH: 3881 1447	PH: 3207 7800	PH: 3715 6200
mangohill@nuway.com.au	ormeau@nuway.com.au	pinerivers@nuway.com.au	redlands@nuway.com.au	western@nuway.com.au

INSTALLATION

Please be advised that the provided resources are to be used as a guide / tips only. You should consult relevant Australian Standards and consult with a licensed contractor. Please understand that installation may vary depending on site conditions. These guides are provided in good faith and do not replace the services of licensed contractors.

On Road Base and Sand

Step 1. Excavate the area to be paved by at least 120mm below the desired height of finished tile. (This amount may change depending on site conditions application)

Step 2. Spread road base and compact with plate compactor to a depth of no less than 75mm. Ensure fall gradient of at least 2:100.

Step 3. Spread the coarse river sand to a depth of 25mm. Use screed and screed rail to ensure a level finish.

Step 4. Set string lines at right angles to ensure that the joint lines are straight and square.

Step 5. Begin to lay tiles, using string line as a guide. Ensure to leave a 3-5mm gap for joints. (Hint: use tile spacers to ensure consistency)

Step 6. Cut tiles with diamond blade saw as needed

Step 7. Fill the joints. Use a polymer joint filling sand. Sweep sand in multiple directions until all joints are filled. Hose of when complete, ensuring not to wash sand out of the joints

Edge Restraint

Tile 20mm
Sand 25mm
Road Base 75mm
Compacted earth

On Pedestals

Step 1. Prepare the concrete foundation to required specifiaction. Ensure there is sufficient fall on existing slab

Step 2. Set string lines to ensure joint lines are straight and square

Step 3. Begin laying tiles on the pedestals. Adjust pedestals as required to keep a level surface with a slope of at least 1:100.

Ensure tiles are tight and free from movement. We suggest a 3mm joint spacer should be used.

Step 4. Ensure all edges are securely restrained.

Note: We recommend to seek professional advice if laying tiles in this method. Pedestal height should be under 100mm.

Be aware tiles may break and collapse if a heavy object falls from a height onto them.

Using Tile Adhesive

Step 1. Prepare the concrete foundation to required specifiaction. Ensure there is sufficient fall on existing slab E
Ensure slab has been cleaned and free from any dirt or grease.

Step 2. Set string lines to ensure joint lines are straight and square

Step 3. Use a high-quality tile adhesive. It should be flexible and suitable for exterior use. Allow for expansion joints as per Australian Standards.

Step 4. Use a 12mm notched trowel to apply adhesive to concrete foundation.

Step 5. Lay tiles using a 3-5mm joint spacing.

Step 6. Grout tiles when compete ensuring to thoroughly remove all excess grout before drying

Note: When using this method you should engage a professional tiler